

# TRANSIENT

T E C H N O L O G I E S



## VI43-125

### Ground Penetrating Radar

High depth antenna: 125 MHz



# VI43-125 GPR

## Specifications

● Antenna frequency	125 MHz
● Analogue-to-Digital Converter range	18 bit
● Dynamic range (not less than)	135 dB
● Data acquisition rate (up to)	55 traces/second
● Survey window	120, 180, 240, 320 ns

● Max. samples per trace	1000
● Trace stacking number	up to 300
● Depth of sounding (determined by soil properties)	up to 15 m
● Spatial resolution	better than 1.0 m
● Trigger mode	single, internal, external
● File size of a single profile	up to 1 000 000 traces

● Interface	USB2 or Wi-Fi
● Dimensions (L x W x H)	1105*580*232 mm
● Weight	25.0 kg
● Operating temperature range	-20°C to 40°C
● Continuous operation time	not less than 8 hours

# VIY3-125 GPR

## Applications

Geophysical

Ecological

Building



Archaeology

Civil engineering

## Main features

- Real time signal pre-processing (Online filtering)
- Auto-Calibrated online filters
- Wide range of post processing tools
- Increased dynamic range due to digital traces-stacking
- Innovative Telbin technology to get high signal-to-noise ratio
- Connection to laptop: Wi-Fi or USB
- All GPR components (antennas system, electronic modules, battery, etc.) are assembled in a single case
- No additional Control Unit.  
Any Windows-based laptop can be used for working
- Direct connecting of Measuring wheel and GPS to antenna unit
- Low power consumption: not less than 8 hours of working on a single charge
- Long-life sealed lead acid batteries permitted for air-carrying
- Durable antenna body made of fiberglass plastic
- Replaceable bottom protector

# VIY3-125 GPR

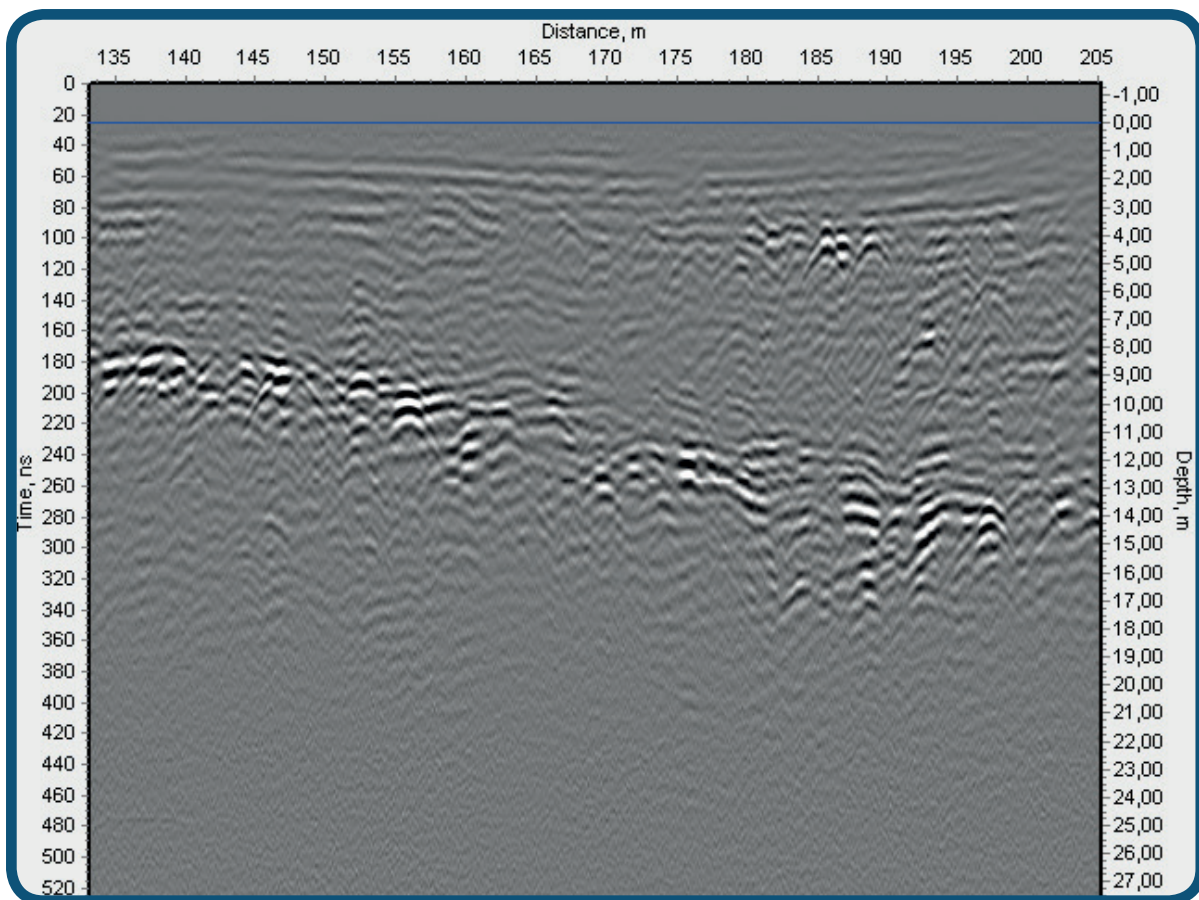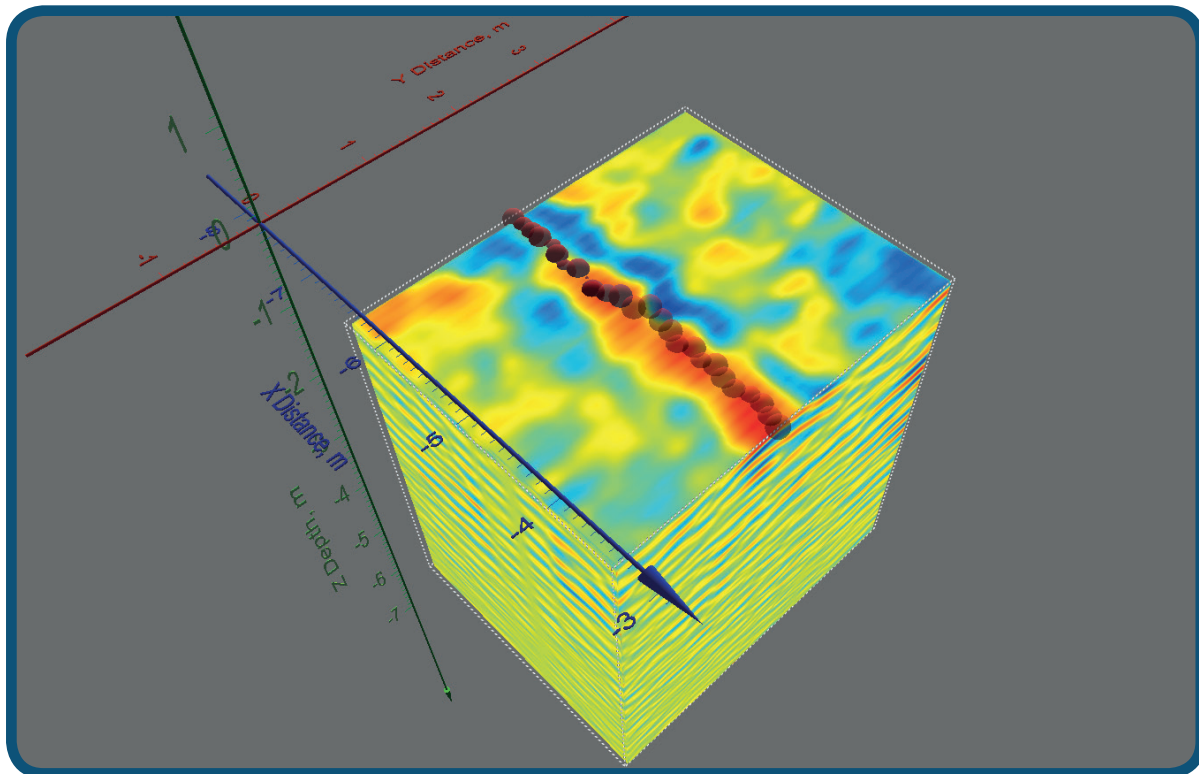

**Transient Technologies LLC**  
office 604, 13 Evgena Sverstuka str.  
Kyiv 02660, Ukraine

phone: +380 (44) 240-85-94  
e-mail: [info@viy.ua](mailto:info@viy.ua)  
[www.viy.ua](http://www.viy.ua)